

Dyson Janzen ARCHITECTS, INC.
1295 N. Wishon Ave
FRESNO, CA 93728
(559) 497-6370 FAX (559) 486-4909

DATE: March 1, 2019

PROJECT: **SELMA POLICE DEPARTMENT (2nd Bid)**

2055 3rd Street, Selma, CA 93662


FOR

CITY OF SELMA

1710 Tucker Street, Fresno, CA 93662

ADDENDUM NO. 2

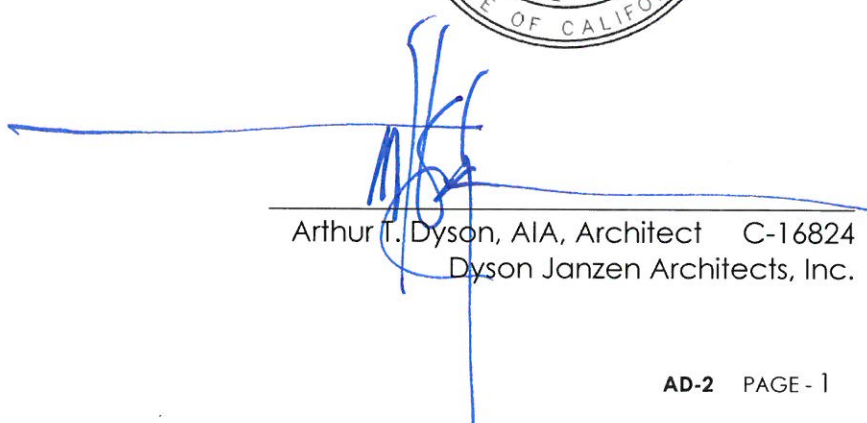


Arthur T. Dyson, AIA, Architect C-16824
Dyson Janzen Architects, Inc.

ADDENDUM NO. 2 (AD-2):

In accordance with instructions presented for Addenda, the following additions, deletions, or modifications shall become part of the Contract Documents for this project and incorporated in the bid.

ITEM NO. 01: UTILITY FEES

1. The City will pay the fees regarding utility and assessment (ex. Cal Water, SKF Sewer) directly to the utility companies.

ITEM NO. 02: SPECIFICATION SECTION 08 14 16 – FLUSH WOOD DOORS

1. All interior flush wood doors to be Type 1: Prefinished Transparent Finish: Premium Grade hardwood veneer. Delete the following articles:
 - a. Under Part 2.1 Materials, delete article A.3. "Type 2: Opaque Paint Finish: Custom Grade hardwood veneer". There are no Type 2 doors used in this project.
 - b. Under Part 2.1 Materials, delete article A.5.a.2.b.) "Paint Grade: Closed grain hardwood". There are no paint grade doors used in this project.

ITEM NO. 03: SHEET A-005

1. At Detail 18 Typ. Acoustic Suspended Ceiling Details, delete the following:
 - a. At note (6), delete the last sentence regarding DSA approval. DSA approval is not required for this project.

ITEM NO. 04: BID RFI RESPONSES

1. See attached Bidder's Questions and Answers.

END OF ADDENDUM NO. 2

City of Selma Police Department Project
 Request for Bid Information
 Bidder's Questions and Answers



RFBI Number		Responsibility
001		
Q:	Please confirm, Article II of the Community Workforce Agreement, section 2.3.2, indicates that any labor for this project whether on-site or off-site be signatory including any fabrication shops per the Schedule-A Agreements.	City of Selma
A:	The PLA agreement will not be modified.	
002		
Q:	Single Line Diagram says to remove (E) 1200/3 MCB & provide (1) 600/3 (City Hall) & (1) 400/3 (Police Station) Circuit Breakers. I have contacted the OEM about doing that. They responded that there is not enough room with the generator cabinet to accommodate this modification.	Dyson Janzen Architects/HDE
A:	Provide subpanel or enclosed circuit breakers next to the existing engine generator.	
003		
Q:	#1 Question: per page A-001 #8 finish schedule notes unless otherwise indicated on drawings, all wood doors shall be pre finished millwork shall be primed & painted QUESTION THAT WE ARE VERIFYING IS ... DO ANY WOOD DOORS PAINT ? Some of the actual drawing is mis leading my estimators to thinking we may need to paint wood doors. #2 we will be adding extra line items cost for the add alternate items per plan for painting. is this still needed or has the alternate items first indicated now nonexistent due to this bid being a re bid	Dyson Janzen Architects
A:	#1 – A-001 Finish schedule note #8 reads “Unless otherwise noted, all wood doors should be prefinished.” Second sentence in note #8 refers to wood trim and millwork. All interior wood doors should be veneered per <M-3> and finished with clear coat. See specification section 08 14 16, part 2.1 Materials, article A.5a.2a) Hardwood. Omit specification section 08 14 16 part 2.1 Materials, Article A.5a.2b) Paint Grade. There are not paint grade interior wood doors in this project. #2 – Revised alternates are listed specification section 01 23 00 and throughout the drawings. There are eight alternates in total. Items A through C in the current bid were also in the original bid.	